


GameChanger[®]

THE CAT6 THAT GOES TWICE AS FAR

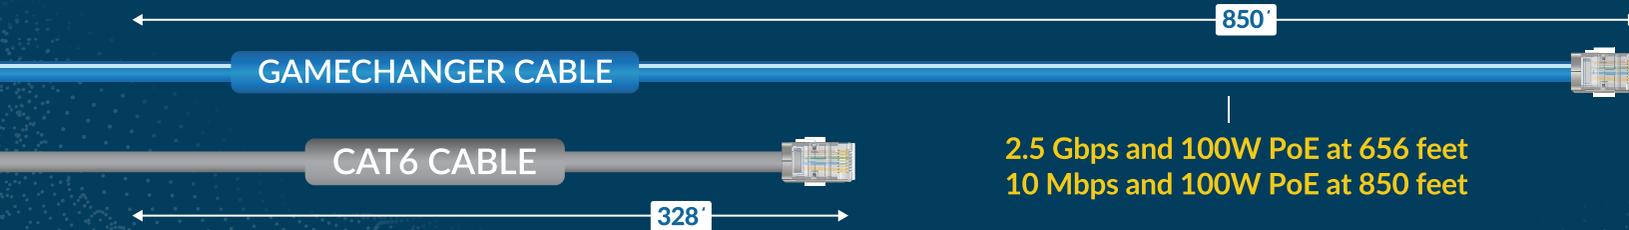

Model Type	Part Number (-- = Color Code)	01 Orange	03 Purple	04 Black	06 Blue	07 Yellow	08 Pink	09 Green	10 White	11 Gray	33 Yellow w/ White Stripe	36 Blue w/ White Stripe	45 Silver (metallic)	Package	UL Listing	UV Resistant	Suitable for Wet Locations	Direct Burial	600V Rating	Shielded	Armored	Hazardous Locations	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)
Riser	2583103--				●				●	●			CMR	✓								-20	+60	.236	
FT4	2584403--							●					CMR FT4	✓								-20	+60	.236	
Plenum	2583003--	●	●	●		●		●	○		●		CMP FT6	✓								-20	+105	.236	
Plenum Shielded	2583705--				●								CMP FT6	✓					✓			-20	+105	.280	
I/O Plenum	2589503--			●*	●*		●*		○*				CMP FT6	✓	✓							-70	+200	.220	
OSP	2583208--		●											✓	✓	✓						-45	+60	.300	
OSP Shielded	2583408--		●										CM-LS	✓	✓	✓	✓	✓				-45	+80	.340	
AIA OSP Shielded	2588808--											●	CM-LS	✓	✓	✓	✓	✓	✓	AIA		-45	+80	.467	
CID1	2588024--		●										ITC-HL	✓	✓				✓	CCW	✓	-50	+90	.984	

* The Indoor/Outdoor Plenum jacket is made from FEP, which will appear transparent and more subtle in color.

Online Resources

Scan the QR code below to get these documents and more helpful information.



[Certification Guide](#)

How to certify your GameChanger cable

[Specs](#)

View technical specifications for all constructions

[Termination Guide](#)

Instructions for terminating GameChanger

[Voltage Drop Chart](#)

View voltage drops by distance

paigedatacom.com/gamechanger

Access Control Cables

ACCESS CONTROL COMPOSITE CABLE

Advanced, Secure & Complete
With (2) 22AWG Low Cap twisted pairs, you can deliver it all.

OSDP READER CABLE



Access Control Composite Cable

Part Number Family	++ = Put Up				-- = Color					UL Listing	Card Reader Element	Door Contact	REX/Motion	Power Lock	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)	Weight (lbs) per 1,000 ft
	03	06	07	08	03 Purple	04 Black	07 Yellow	10 White	11 Gray									
23665+++	-	250' Reel	500' Reel	1000' Reel	●	●	○			CMP	22/2PR STR LoCap + 18/2 STR OAS	22/4 STR	22/4 STR	16/2 STR	-5°C	75°C	.570"	125
23688+++	-	250' Reel	500' Reel	1000' Reel	●			●		CMR/CMX	22/2PR STR LoCap + 18/2 STR OAS	22/4 STR	22/4 STR	16/2 STR	-5°C	75°C	.528"	130

OSDP Reader Cable

Part Number Family	++ = Put Up				-- = Color					UL Listing	Card Reader Element	Door Contact	REX/Motion	Power Lock	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)	Weight (lbs) per 1,000 ft
	03	06	07	08	03 Purple	04 Black	07 Yellow	10 White	11 Gray									
22280+++	1,000' Box	-	-	-	-	●	-	-		CMP	22/1PR Shielded LoCap+ 18/2c	-	-	-	-5°C	75°C	.187"	25

For pricing, contact team@paigedatacom.com

Online Resources

Scan the QR code to get more information.



Specs

View technical specifications for Hybrid Wiegand + OSDP Access Control Composite Cable, OSDP Card Reader Cable and OSDP Access Control Composite Cable

paigedatacom.com/osdp